

CryoComplete™

Electrical measurements in cryogenic environments

CryoComplete™

77 K to 500 K

Everything you need to start making low-level measurements.



Complete measurement system



Affordable bundled price




Quick lead time

PC with MeasureLINK™

A PC with MeasureLINK provides the user interface to control your cryogenic system. MeasureLINK enables a wide range of capabilities, including charting data, controlling instrumentation, and system monitoring with a cryostat-specific process view.

LN₂ Cryostat

Environment by Janis VPF-100 sample in vacuum cryostat with four fused quartz windows provides a variable temperature sample environment with no valves or adjustments required.

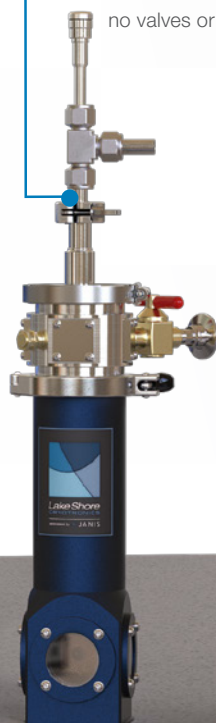

Source + Measure + Lock-in

Run ultra-low-noise AC/DC measurements with the MeasureReady® M81-SSM synchronous source and measure system. In addition to M81-SSM-4 instrument, it includes a BCS-10 balanced current source module and the VM-10 DC/AC/lock-in voltmeter module with a combined noise performance (differential) of 4.1 nV/√Hz

Temperature Control

Control temperature within 50 mK with a Lake Shore Model 335 temperature controller, a Lake Shore precision, calibrated diode, and a pre-wired heater. Advanced PID autotuning, pre-programmed sensor calibration, and default cryostat tuning enables fast setup and operation.



Quantum Design
EUROPE

Quantum Design GmbH
Im Tiefen See 58
D-64293 Darmstadt

Matthias Müller: ☎ +49 6151 8806-554,
mueller@qd-europe.com
Find your local contact at www.qd-europe.com



CryoComplete™

Electrical measurements in cryogenic environments

Typical applications

Affordable and ready-to-measure 77 K to 500 K electrical characterization cryostat system for characterizing electro-optical samples while providing low-temperature control and electrical test automation. CryoComplete has everything you need to get started, including all the cables and accessories to start your measurement.

Thermal transport	1D materials, thermoelectric materials	✓	✓					✓				✓
Materials research	Nanodevices, superconducting devices, nonlinear devices			✓				✓	✓	✓	✓	
Materials development	Linear systems, sensors			✓						✓	✓	

Measurement benefits

- Simultaneous source/measure
- Synchronous source/measure
- Low noise source/measure
- Dual AC/DC sourcing
- Lock-in autoranging

Common measurements

- Differential conductance, low frequency
- Differential conductance, high frequency
- Resistance, low temperature
- I-V characteristics
- Thermal conductivity

Specifications

Standard system capabilities

Operating temperature range:	77 K to 500 K
Sample environment:	Sample in vacuum
Temperature stability:	50 mK
Pour-fill reservoir capacity:	1.2 L LN ₂
Cool down time:	30 minutes
Working time:	6 to 8 hours
Optical ports:	(4) quartz windows
Electrical sample mount:	Pre-wired mounting plate with (8) contact pins

Resistance/I-V measurements

Source modes:	DC, sine, triangle, square
Source ranges:	1 pA to 100 mA
Source frequency:	100 μHz to 100 kHz (square <5 kHz)
Measurement limits:	10 V max
Input impedance:	≥10 GΩ (differential)

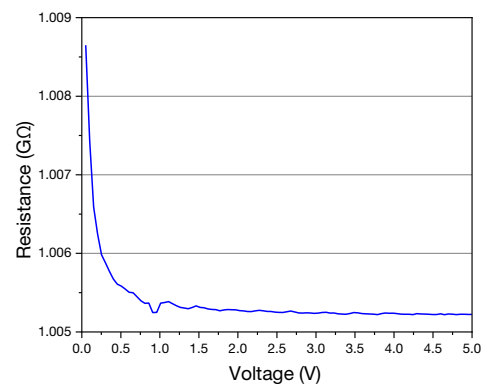


Chart 1: VM-10 versus CM-10 DC measurement, 1GΩ resistor NPLC 30.

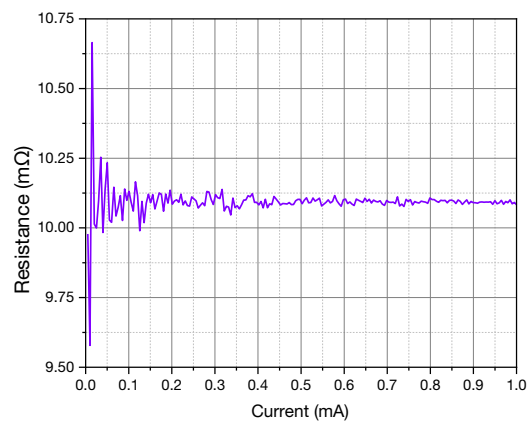


Chart 2: BCS-10 versus VM-10, 10 mΩ resistor, 4-probe, 2TX and 2CXLIA at 83Hz, FIR=3, tau= 200 ms.

Available beginning of 2023

What is included: PC with Windows® 10 and MeasureLINK installed, monitor, VPF-100 cryostat, sample holder, 3 BNC cables, 2 triaxial cables, imperial and metric base plate, MS1-SSM-4 synchronous source measure system instrument, BCS-10 balanced (differential) triaxial current source module, VM-10 low-noise single-ended or differential BNC DC/AC/lock-In voltmeter module, 335 temperature controller, 335 temperature controller input cable, calibrated silicon diode sensor.