



# ImageIR® 6300 Z

Radiometric Zoom Camera for More Efficiency

640  
x  
512  
Detector

**Detector Format**  
Modern XBN detector;  
10 µm pitch

±2  
%

**Measurement Accuracy**  
Repeatable measurements  
for different field of views

Focus

**Motor Focus**  
Precise, fast and remotely controllable;  
including multiple autofocus functions

7.5x  
Optical

**Zoom Lens**  
7.5x zoom lens; focal length ranges  
(15 ... 115) mm or (25 ... 170) mm

High-speed  
Mode

**High-speed Mode**  
Increase frame rates and thermal resolution at  
the same time using binning technology

Longlife

**Long-life Cooler**  
Enables the maintenance-free  
use over long operating times

Smaller, lightweight, without tedious lens changes – efficiency has a new name: The ImageIR® 6300 Z with a powerful zoom lens and a SWaP detector (**Size, Weight and Power**).


The zoom camera ImageIR® 6300 Z is a small, lightweight, compact system for universal use in thermographic temperature measurements in a wide range of applications. Its excellent price-performance ratio and the remarkable user-friendliness result from the systematic use of the latest technologies in optics, detector and electronics. It has a 7.5x zoom lens integrated as standard, which allows, in combination with the motorised focus, a fast and flexible adjustment to different object distances and sizes while maintaining stable image quality and high measurement accuracy.

Heart of the infrared camera is the SWaP detector, a cooled focal-plane array photon detector with a format of (640x512) IR pixels, which operates in snap-shot mode. The maximum IR frame rate is 180Hz and can be increased up to 600Hz with the binning function. Switching between the two speed modes is conveniently done via software and allows exact time tracking of a fast process.

## Technical Specifications

|  |   |
|--|---|
| Spectral range                                 | (3.6 ... 4.15) $\mu\text{m}$  |
| Pitch  | 10 $\mu\text{m}$  |
| Detector                                       | XBn   |
| Detector format (IR pixels)                    | (640 $\times$ 512)  |
| Image acquisition                              | Snapshot  |
| Readout mode                                   | ITR/IWR   |
| Aperture ratio                                 | f/3.6   |
| Detector cooling                               | Stirling cooler   |
| Temperature measuring range                    | (-10 ... 600) $^{\circ}\text{C}$  |
| Measuring accuracy                             | $\pm 2^{\circ}\text{C}$ or $\pm 2\%$  |
| Temperature resolution @ 30 $^{\circ}\text{C}$ | 0.03 K  |
| Frame rate                                     | Up to 180 Hz; high-speed mode: up to 600 Hz*  |
| Focus  | Motorised: manually or automatically*   |
| Focusing time                                  | < 2.0 s   |
| Lens focal length                              | (15 ... 115) mm or (25 ... 170) mm; (7.5 $\times$ optical zoom)   |
| Zoom setting time                              | < 2.0 s   |
| Field of view                                  | (24.5 $\times$ 20) $^{\circ}$ ... (3.2 $\times$ 2.5) $^{\circ}$ or (16.3 ... 13) $^{\circ}$ ... (2.15 $\times$ 1.7) $^{\circ}$  |
| Minimum object distance                        | (0.05 ... 2.5) m or (0.1 ... 10) m  |
| Dynamic range                                  | 14 bit  |
| Integration time                               | (1 ... 40,000) $\mu\text{s}$  |
| Interfaces                                     | GigE  |
| Trigger  | 1 IN / 1 OUT  |
| Tripod adapter                                 | 1/4" photo thread, 18 $\times$ M4   |
| Power supply                                   | 12 V DC   |
| Storage and operation temperature              | (-40 ... 70) $^{\circ}\text{C}$ , (-20 ... 50) $^{\circ}\text{C}$   |
| Protection degree                              | IP54, IP65*   |
| Dimensions; weight                             | (230 $\times$ 100 $\times$ 100) mm or (265 $\times$ 100 $\times$ 100) mm; 2.0 kg  |
| Further functions                              | Integrated image processing and acquisition, control via web interface, high-speed mode*  |
| Analysis and evaluation software               | IRBIS $^{\circ}$ 3, IRBIS $^{\circ}$ 3 view, IRBIS $^{\circ}$ 3 plus*, IRBIS $^{\circ}$ 3 professional*, IRBIS $^{\circ}$ 3 control*, IRBIS $^{\circ}$ 3 online*, IRBIS $^{\circ}$ 3 process*, IRBIS $^{\circ}$ 3 active*, IRBIS $^{\circ}$ 3 mosaic*, IRBIS $^{\circ}$ 3 vision* |

\* Depending on model

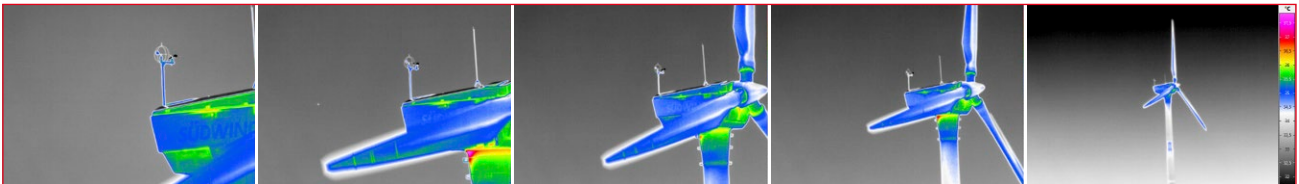

Infrared image of a wind turbine with different zoom levels

Infrared cameras of the Imager $^{\circ}$ R $^{\circ}$  series measure temperatures precisely and contactless. The Imager $^{\circ}$ R $^{\circ}$  6300Z is radiometrically calibrated over the entire focal length range. For the innovative XBn detector used, a smaller stirling cooler with lower power is sufficient due to the higher working temperature, which reduces the overall power consumption, dimensions and weight of the Imager $^{\circ}$ R $^{\circ}$  6300Z and significantly extends the maintenance-free service life.

The zoom camera can be easily integrated into existing system environments in a space-saving way. It is suitable for universal use in research and development, but also for integration into GIMBAL systems in the field of flight thermography. With its high-performance image processing electronics, the camera can output the IR image data in real time to several video and data interfaces as well as record and evaluate it autonomously. Large amounts of data are stored on the integrated SSD. This camera

can also be operated via smartphone or tablet using its web interface. With these features and the possibility to power it from an external battery, this camera is ready for mobile outdoor use.

### Fields of application

- Research and development
- Aerial thermography: inspection and monitoring tasks
- Quality assurance
- Materials testing
- Integration solutions



© InfraTec 04/2022 – All stated product names and trademarks remain in property of their respective owners. Design, specification and technical progress subject to change without prior notice.

#### Headquarters

InfraTec GmbH  
Infrarotsensorik und Messtechnik  
Gostritzer Straße 61 – 63  
01217 Dresden / GERMANY

Phone +49 351 82876-610  
Fax +49 351 82876-543  
E-mail thermo@InfraTec.de  
[www.InfraTec.eu](http://www.InfraTec.eu)

#### USA office

InfraTec infrared LLC  
5048 Tennyson Pkwy.  
Plano TX 75024 / USA

Phone +1 844-226-3722 (toll free)  
E-mail thermo@InfraTec-infrared.com  
[www.InfraTec-infrared.com](http://www.InfraTec-infrared.com)